



PLATINUM SMART-HEAT


Top kvalitet og ydelse samt et udseende, der matcher

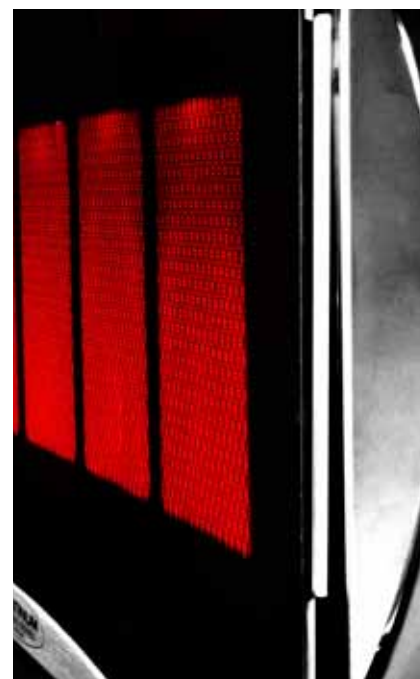


Børstet rustfrit stål og en keramisk front gør Platinum Smart-Heat™ Gas er egnet til de mest eksklusive udendørs miljøer. Den tonede keramiske front forvandler en ellers skæmmende rødt lys udledt af de traditionelle lysbølger til en blød og behagelig glød, forbedrer den samlede oplevelse og sikrer jævn varmefordeling. Retningsbestemt loft eller vægmontering giver større positionerings alsidighed og varme dækning.







FEATURES:

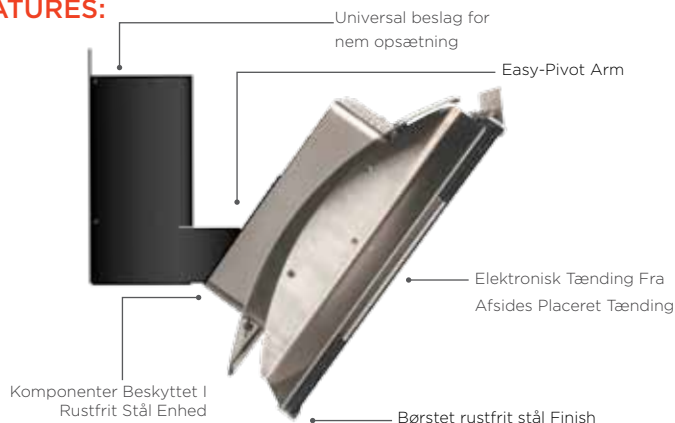

500-Series

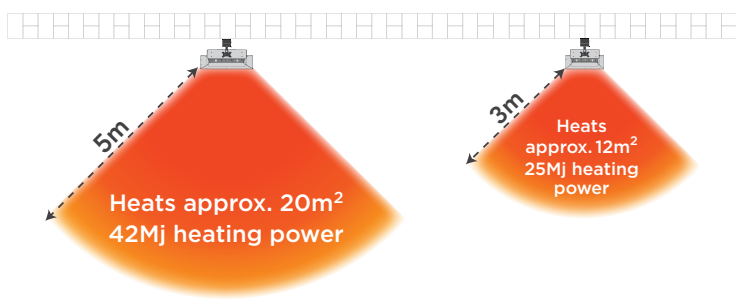

300-Series

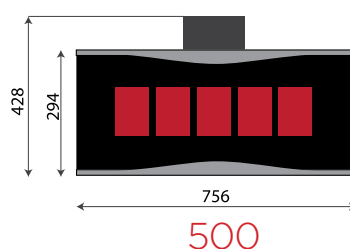

TILBEHØR

▪ Loftsbeslag elektrolytbehandlet i sort *

Den dobbelt rettede montering af loftsbeslag giver større mulighed for positionering i større områder.



- Dobbelt eller enkelt varmer montering
- 5 længder til at montere i flg. loftshøjder: 3,2m. 3,4m. 3,6m. 3,8m. 4,0m.

- justerbar monterings beslag, der passer til de fleste installationer

- Dobbelt belagt varme reflektor giver mulighed for installering tættere på loft



5 længder til montering i flg. lofthøjder: 3,2m 3,4m. 3,6m. 3,8m. 4,0m.



*All accessories sold separately

Model		300 Series	500 Series
Part no.	LPG ^{1,2}	2620130	2620140
	Natural Gas ^{1,2}	2620131	2620141
Heat Deflector part no.		2620165	2620166
Ceiling Poles		5 pole lengths to suit ceiling heights of 3.2, 3.4, 3.6, 3.8 and 4m (contact Bromic Heating for more information)	
Heat Output (on LPG and NG)		25Mj	42Mj
Approximate area heated (m ²)		12m ²	20m ²
Gas connection		3/8" SAE	3/8" SAE
Electrical connection		240 Volt, 3-pin insulated plug	240 Volt, 3-pin insulated plug
Dimension (WxDxHmm)		560 x 382 x 428mm	756 x 382 x 428mm
Min. distance to combustible materials ²		Side: 1100mm	
(without heat deflector) ²		Above (to ceiling): 1100mm	
(with heat deflector) ²		Above (to ceiling): 350mm	
Mounting height requirement to ground ³		Wall Mount: 2000mm, Ceiling Pole Mount: 2500mm	
Weight (kg)		12.5kg	16.5kg

¹Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. ²The temperature will not exceed 65°C above the ambient temperature at specified distances. Please consult material manufacturer for temperature ratings and suitability. Bromic Heating takes no responsibility for material compliance. ³Installation must be performed in accordance with AS5601 installation code (or relevant standard) and must comply with any additional jurisdictional requirements. Bromic takes not responsibility for incorrect or non-compliant installations

MINDSTEKRAV TIL INSTALLATIONS HØJDE

