


TUNGSTEN SMART-HEAT

Et designet og omkostningsbevidst produkt med forening af æstetik og funktion



Et designet, omkostningsbevidst produkt, som ikke forskrækker æstetikken på bekostning af funktionen. Det patenterede direkte tændingssystem, aldrig før set på en udendørs gas strålevarmere, sikrer en pålidelig start og effektiv drift, selv i blæst på op til 12 km / h. Easy pivot arm giver større positionering mulighed og varme dækning


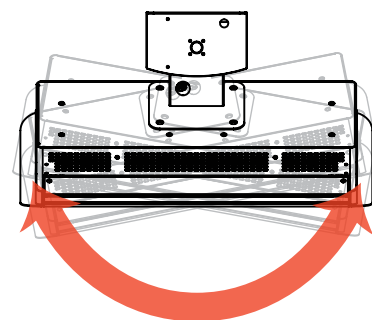


TUNGSTEN SMART-HEAT

BROMIC
HEATING




FEATURES:

- Elegant sort design
- Universelbeslag, som gør det muligt at opgradere modellen uden brug af ekstra tilbehør
- 2-vejs easy-pivot arm, som gør det nemt at rotere varmeren 25°
- Elektronisk tænding. en eller flere enheder kan tændes eller slukkes samtidigt ved hjælp af en enkelt fjernbetjent knap
- Automatisk gentænding. Skulle varmeren af en eller anden grund ikke genstarte, vil den integrerede "nødslukkekontrol" slukke for varmeren øjeblikkeligt for sikkerhed.
- Rustfrit stål kabinet - komponenter er beskyttet mod manipulation. Hjælper med at forebygge at snavs og støv samler sig på ledninger og komponenter.

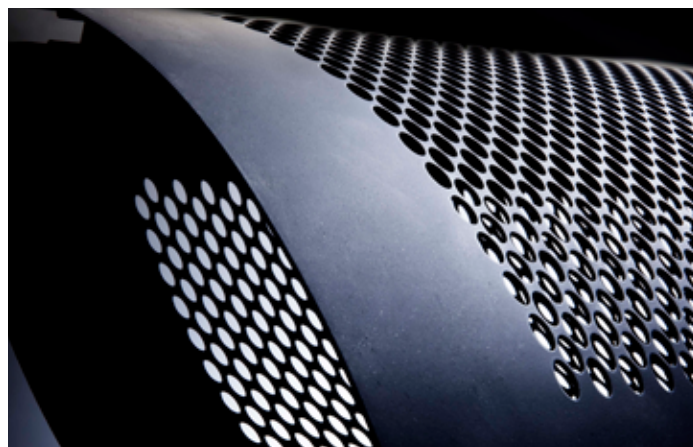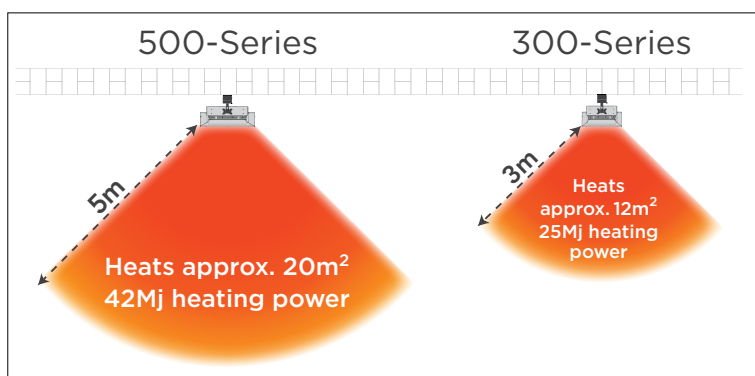

TILBEHØR*

- 2-vejs loftsbeslag
- Loftsbeslaget skal monteres 2,5m fra jorden
- Dobbeltlaget reflektor.(se tilbehør i skema)

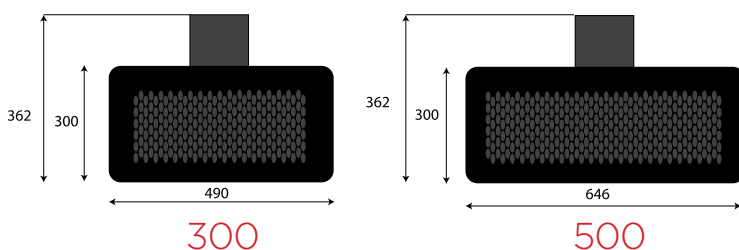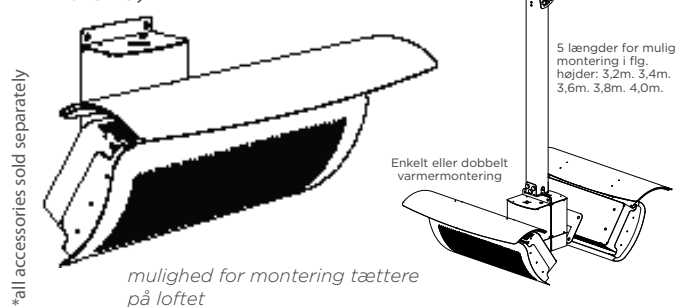

Model		300 Series	500 Series
Part no.	LPG ^{1,2}	2620330	2620340
	Natural Gas ^{1,2}	2620331	2620341
Heat Deflector part no.		2620165	2620166
Ceiling Pole		5 pole lengths to suit ceiling heights of 3.2, 3.4, 3.6, 3.8 and 4m (contact Bromic Heating for more information)	
Heat Output (on LPG and NG)		25Mj	42Mj
Approximate area heated (m ²)		up to 12m ²	up to 20m ²
Gas connection		3/8" SAE	3/8" SAE
Electrical connection		240 Volt, 3-pin insulated plug	240 Volt, 3-pin insulated plug
Dimension (WxDxHmm)		490 x 464 x 428mm	646 x 464 x 428mm
Min. distance to combustible materials ²		Side: 1100mm	
(without heat deflector) ²		Above (to ceiling): 1100mm	
(with heat deflector) ²		Above (to ceiling): 350mm	
Mounting height requirement to ground ³		Wall Mount: 2000mm, Ceiling Pole Mount: 2500mm	
Weight (kg)		14kg	18kg

¹Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. ²The temperature will not exceed 65°C above the ambient temperature at specified distances. Please consult material manufacturer for temperature ratings and suitability. Bromic Heating takes no responsibility for material compliance. ³Installation must be performed in accordance with AS5601 installation code (or relevant standard) and must comply with any additional jurisdictional requirements. Bromic takes not responsibility for incorrect or non-compliant installations

MINDSTEKRAV TIL INSTALLATIONS HØJDE

